

SFMTA ENFORMENT
ATAC 6" BOOT

ITEM 27


ATAC 6" BOOT STYLE # 12002, OR acceptable like alternate.

PRODUCT DESCRIPTION ATAC 6" Boot

STYLE NO. 12002



**SHOCK
MITIGATION
SYSTEM™**

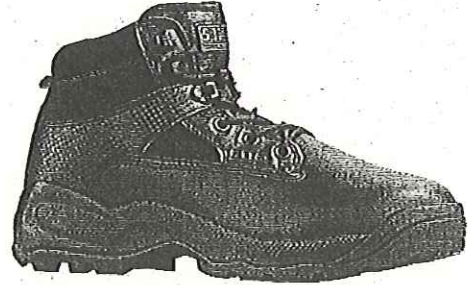

FABRIC TYPE

- Full grain leather
- 1200 Denier Nylon
- Ankle stabilizer and speed hook to lace tighter at the ankle
- Suede padded collar

UPPERFEATURES & BENEFITS

- Polished leather toe
- Leather and nylon upper
- Antibacterial and moisture-wicking lining
- Shock Mitigation System™
- Dual Density Polyurethane® (anti odor and anti microbial control)
- Non metallic shank
- Semi-rigid heel and toe reinforcement
- Available in wide widths

OUTSOLE DETAILS

Rubber outsole for slip and oil resistance/ Quiet outsole non squeaking
Injected midsole for flexibility,
SEE BELOW FOR OUTSOLE DESIGN DETAILS

Design Description

The 5.11 ATAC 6" Boot is perfect for the officer who prefers an ankle-height boot. The polished leather toe maintains a neat, clean and professional look and meets most organizational requirements for black leather boots. The nylon upper is comfortable and durable. Every boot in our line includes our trademark Shock Mitigation System™ which combines construction components to offer you the ultimate in support for high impact activity. The 5.11 Shock Mitigation System™ is lightweight with superior compression and rebound resulting in comfort, stability and optimal speed.

LABELS

INSIDE TONGUE LABEL WITH NAME OF SHOE, STYLE NUMBER, PO NUMBER
CONTENT AND COUNTRY OF ORIGIN

CLOSURES

Round laces, eyelets and speed hook

STOCK SIZES

MEDIUM : SIZES 4,5,6-12(WHOLE AND HALF SIZES), 13,14,15
WIDES: 7-12(WHOLE AND HALF SIZES),13

COLORS

BLACK

SFMTA ENFORCEMENT
MEN'S LEATHER SHOES

ITEM 28

WEINBRENNER SHOE COMPANY THOROGOOD MEN'S LEATHER FOOTWEAR
834-6908 SOFT STREETS DOUBLE TRACK TOE OXFORD COMFORT UNIFORM
FOOTWEAR, or acceptable like alternate.

TECHNICAL SPECIFICATIONS

- 1 Scope – This specification will outline the requirements for a black Uniform Double Track Oxford style, with polishable full grain leather and a built in support and comfort system. Outsole incorporates slip and oil resisting properties without giving up a durable design or construction.
- 1.2 This specification is for a non-safety toe oxford style.
- 2 Quality Assurance – Quality Assurance is designed to meet the following requirements.
 - 2.1 ISO 9001-2000 Registered (International Standard/ISO 2000, Quality Systems Specification for Design, Development, Production, Installation and Servicing).
 - 2.2 Postal Certified – Footwear bearing the SR/USA label have been manufactured according to USPS 89 and meet sole slip resistance (ASTM F-489) domestic source end product. They are certified by the US Postal Service and Department of the Navy, Navy Clothing and Textile Research Facility.
- 3 Description
 - 3.1 Design – This footwear is designed for professional uniform personnel who require maximum comfort and support. Sole performance features include a flexible and durable crack resisting design (CRd) with slip resisting and non-marking characteristics.
 - 3.2 Construction – Durable lightweight direct injection two density polyurethane with E-Motion flexible construction for superior comfort.
 - 3.3 Sizes & Widths – Footwear is available in all of the following sizes.
Men's: 7 – 12, 13, 14 including half sizes through 12
Widths: Medium, Wide and (Extra Wide to 13) as measured by Brannock Device.

- 3.4 Upper Fitting – All upper fitting is 8 – 10 stitches per inch, B69 nylon thread single and double needle. This allows for a more durable construction.
- 3.5 Leather – Upper leather 1.6 – 1.8 mm black full grain polishable leather. The leather is tumbled to make it soft and flexible yet water resisting.
- 3.6 Lining – Durable comfort weave to wick away moisture for drier, cooler, healthier feet.
- 3.7 Shank – Non-metallic Tru-fit fiberglass, durable, cold and rust resisting and contoured to the insole for greater balance and superior support.
- 3.8 Footbed – Contoured Super Cushion polyurethane removable, with polyester cover for moisture wicking. This footbed provides total foot cushioning and comfort. Polyurethane is closed cell and encapsulates millions of air bubbles that do not compress and flatten out.
- 3.9 Insole – Titex covered 3 iron cellulose board for maximum durability, flexibility and cushion support transfer during the end user's forward motion.
- 3.10 Outsole – Thorogood Soft Streets two density polyurethane direct attach sole with oil and slip resisting compound. The outsole promotes self cleaning and provides a crack resisting design.
- 3.11 Counter – Thermo formed counter providing greater heel stability and comfort.
- 3.12 Box Toe – XL-30 Thermoplastic to maintain toe shape and provide ample room for the end user's foot.
- 3.13 Lace – 30" black round taslon nylon for a strong and durable support system.
- 3.14 Hardware – Four reinforced black corrosive proof AA coated aluminum eyelets designed to blend in with the surround leather color. Aluminum eyelets are metal detection device friendly.



SFMTA ENFORCEMENT
WOMEN'S LEATHER SHOES

ITEM 29

WEINBRENNER SHOE COMPANY THOROGOOD WOMEN'S LEATHER FOOTWEAR 534-6908 SOFT STREETS DOUBLE TRACK TOE OXFORD COMFORT UNIFORM FOOTWEAR or acceptable like alternate.

TECHNICAL SPECIFICATIONS

- 1 Scope – This specification will outline the requirements for black Uniform Double Track Oxford style, with polishable full grain leather and a built in support and comfort system. Outsole incorporates slip and oil resisting properties without giving up a durable design or construction.
- 1.2 This specification is for a non-safety toe oxford style.
- 2 Quality Assurance – Quality Assurance is designed to meet the following requirements.
 - 2.1 ISO 9001-2000 Registered (International Standard/ISO 2000, Quality Systems Specification for Design, Development, Production, Installation and Servicing).
 - 2.2 Postal Certified – Footwear bearing the SR/USA label have been manufactured according to USPS 89 and meet sole slip resistance (ASTM F-489) domestic source end product. They are certified by the US Postal Service and Department of the Navy, Navy Clothing and Textile Research Facility.
- 3 Description
 - 3.1 Design – This footwear is designed for professional uniform personnel who require maximum comfort and support. Sole performance features include a flexible and durable crack resisting design (CRd) with slip resisting and non-marking characteristics.
 - 3.2 Construction – Durable lightweight direct injection two density polyurethane with E-Motion flexible construction for superior comfort.
 - 3.3 Sizes & Widths – Footwear is available in all of the following sizes.
Women's: 6 – 11 including half sizes
Widths: Medium and Wide as measured by Brannock Device.

- 3.4 Upper Fitting – All upper fitting is 8 – 10 stitches per inch, B69 nylon thread single and double needle. This allows for a more durable construction.
- 3.5 Leather – Upper leather 1.6 – 1.8 mm black full grain polishable leather. The leather is tumbled to make it soft and flexible yet water resisting.
- 3.6 Lining – Durable comfort weave to wick away moisture for drier, cooler, healthier feet.
- 3.7 Shank – Non-metallic Tru-fit fiberglass, durable, cold and rust resisting and contoured to the insole for greater balance and superior support.
- 3.8 Footbed – Contoured Super Cushion polyurethane removable, with polyester cover for moisture wicking. This footbed provides total foot cushioning and comfort. Polyurethane is closed cell and encapsulates millions of air bubbles that do not compress and flatten out.
- 3.9 Insole – Titex covered 3 iron cellulose board for maximum durability, flexibility and cushion support transfer during the end user's forward motion.
- 3.10 Outsole – Thorogood Soft Streets two density polyurethane direct attach sole with oil and slip resisting compound. The outsole promotes self cleaning and provides a crack resisting design.
- 3.11 Counter – Thermo formed counter providing greater heel stability and comfort.
- 3.12 Box Toe – XL-30 Thermoplastic to maintain toe shape and provide ample room for the end user's foot.
- 3.13 Lace – 30" black round taslon nylon for a strong and durable support system.
- 3.14 Hardware – Four reinforced black corrosive proof AA coated aluminum eyelets designed to blend in with the surround leather color. Aluminum eyelets are metal detection device friendly.



SFMTA ENFORCEMENT
MEN'S LEATHER SHOES

ITEM 30

WEINBRENNER SHOE COMPANY THOROGOOD MEN'S LEATHER FOOTWEAR
834-6906 SOFT STREETS PLAIN TOE CHUKKA COMFORT UNIFORM
FOOTWEAR or acceptable like alternate.

TECHNICAL SPECIFICATIONS

- 1 Scope – This specification will outline the requirements for a black Uniform Plain Toe Chukka style, with polishable full grain leather and a built in support and comfort system. Outsole incorporates slip and oil resisting properties without giving up a durable design or construction.
- 1.2 This specification is for a non-safety toe chukka style.
- 2 Quality Assurance – Quality Assurance is designed to meet the following requirements.
 - 2.1 ISO 9001-2000 Registered (International Standard/ISO 2000, Quality Systems Specification for Design, Development, Production, Installation and Servicing).
 - 2.2 Postal Certified – Footwear bearing the SR/USA label have been manufactured according to USPS 89 and meet sole slip resistance (ASTM F-489) domestic source end product. They are certified by the US Postal Service and Department of the Navy, Navy Clothing and Textile Research Facility.
- 3 Description
 - 3.1 Design – This footwear is designed for professional uniform personnel who require maximum comfort and support. Sole performance features include a flexible and durable crack resisting design (CRd) with slip resisting and non-marking characteristics.
 - 3.2 Construction – Durable lightweight direct injection two density polyurethane with E-Motion flexible construction for superior comfort.
 - 3.3 Sizes & Widths – Footwear is available in all of the following sizes.
Men's: 7 – 12, 13, 14 including half sizes through 12
Widths: Medium, Wide and (Extra Wide to 13) as measured by Brannock Device.

- 3.4 Upper Fitting – All upper fitting is 8 – 10 stitches per inch, B69 nylon thread single and double needle. This allows for a more durable construction.
- 3.5 Leather – Upper leather 1.6 – 1.8 mm black full grain polishable leather. The leather is tumbled to make it soft and flexible yet water resisting.
- 3.6 Lining – Durable comfort weave to wick away moisture for drier, cooler, healthier feet.
- 3.7 Shank – Non-metallic Tru-fit fiberglass, durable, cold and rust resisting and contoured to the insole for greater balance and superior support.
- 3.8 Footbed – Contoured Super Cushion polyurethane removable, with polyester cover for moisture wicking. This footbed provides total foot cushioning and comfort. Polyurethane is closed cell and encapsulates millions of air bubbles that do not compress and flatten out.
- 3.9 Insole – Titex covered 3 iron cellulose board for maximum durability, flexibility and cushion support transfer during the end user's forward motion.
- 3.10 Outsole – Thorogood Soft Streets two density polyurethane direct attach sole with oil and slip resisting compound. The outsole promotes self cleaning and provides a crack resisting design.
- 3.11 Counter – Thermo formed counter providing greater heel stability and comfort.
- 3.12 Box Toe – XL-30 Thermoplastic to maintain toe shape and provide ample room for the end user's foot.
- 3.13 Lace – 30" black round taslon nylon for a strong and durable support system.
- 3.14 Hardware – Four reinforced black corrosive proof AA coated aluminum eyelets designed to blend in with the surround leather color. Aluminum eyelets are metal detection device friendly.



SFMTA ENFORCEMENT
MEN'S LEATHER SHOES

ITEM 31

WEINBRENNER SHOE COMPANY THOROGOOD WOMEN'S LEATHER
FOOTWEAR 534-6906 SOFT STREETS PLAIN TOE CHUKKA COMFORT
UNIFORM FOOTWEAR or acceptable like alternate.

TECHNICAL SPECIFICATIONS

- 1 Scope – This specification will outline the requirements for black Uniform Plain Toe Chukka style, with polishable full grain leather and a built in support and comfort system. Outsole incorporates slip and oil resisting properties without giving up a durable design or construction.
- 1.2 This specification is for a non-safety toe chukka style.
- 2 Quality Assurance – Quality Assurance is designed to meet the following requirements.
 - 2.1 ISO 9001-2000 Registered (International Standard/ISO 2000, Quality Systems Specification for Design, Development, Production, Installation and Servicing).
 - 2.2 Postal Certified – Footwear bearing the SR/USA label have been manufactured according to USPS 89 and meet sole slip resistance (ASTM F-489) domestic source end product. They are certified by the US Postal Service and Department of the Navy, Navy Clothing and Textile Research Facility.
- 3 Description
 - 3.1 Design – This footwear is designed for professional uniform personnel who require maximum comfort and support. Sole performance features include a flexible and durable crack resisting design (CRd) with slip resisting and non-marking characteristics.
 - 3.2 Construction – Durable lightweight direct injection two density polyurethane with E-Motion flexible construction for superior comfort.
 - 3.3 Sizes & Widths – Footwear is available in all of the following sizes.
Women's: 6 – 11 including half sizes
Widths: Medium and Wide as measured by Brannock Device.
 - 3.4 Upper Fitting – All upper fitting is 8 – 10 stitches per inch, B69 nylon thread single and double needle. This allows for a more durable construction.

- 3.5 Leather – Upper leather 1.6 – 1.8mm black full grain polishable leather. The leather is tumbled to make it soft and flexible yet water resisting.
- 3.6 Lining – Durable comfort weave to wick away moisture for drier, cooler, healthier feet.
- 3.7 Shank – Non-metallic Tru-fit fiberglass, durable, cold and rust resisting and contoured to the insole for greater balance and superior support.
- 3.8 Footbed – Contoured Super Cushion polyurethane removable, with polyester cover for moisture wicking. This footbed provides total foot cushioning and comfort. Polyurethane is closed cell and encapsulates millions of air bubbles that do not compress and flatten out.
- 3.9 Insole – Titex covered 3 iron cellulose board for maximum durability, flexibility and cushion support transfer during the end user’s forward motion.
- 3.10 Outsole – Thorogood Soft Streets two density polyurethane direct attach sole with oil and slip resisting compound. The outsole promotes self cleaning and provides a crack resisting design.
- 3.11 Counter – Thermo formed counter providing greater heel stability and comfort.
- 3.12 Box Toe – XL-30 Thermoplastic to maintain toe shape and provide ample room for the end user’s foot.
- 3.13 Lace – 30” black round taslon nylon for a strong and durable support system.
- 3.14 Hardware – Four reinforced black corrosive proof AA coated aluminum eyelets designed to blend in with the surround leather color. Aluminum eyelets are metal detection device friendly.



SFMTA ENFORMENT
LACE-UP WORK BOOT

ITEM 32

REDBACK LACE-UP WORK BOOT , Model: UABK, or acceptable like alternate.

CODE: UABK

MODEL DESCRIPTION: 'Alpine' Black Kip with TPU/PU sole
HEAVY DUTY GENERAL PURPOSE SPEED LACE - L/Up WORK BOOT
SERVICE FOOTWEAR - (To AS/NZS2210-2000 production and component standards, where applicable.)

SPECIFIC WORKPLACE REQUIREMENTS:

To provide comfort and protection from entry of foreign matter during extended periods of wear in the general workplace and Station/Rescue and emergency service environments. Features Lightweight, Insulated and Shock absorbing construction for comfort on concrete floors. The footwear is to provide a quick release system to assist ingress and egress of foot whilst maximising ankle support.



GENERAL USER PROPERTIES:

to maintain the health and performance of foot and related structures ~

Enhance specific foot functions including shock-absorbency and slip resistance

Encourage normal foot functioning including maintaining forefoot flexibility, fore-to-hind foot and heel stability

GENERAL FOOTWEAR DESCRIPTION:

Ankle height (180mm from wear surface to top of boot at back.) 5 hole tie 'D Ring' speed lace fastened boot with padded collar and bellows tongue with Metatarsal padding patch. All leather upper with external counter support. Sole / insole design incorporates impact absorbing features to reduce heel strike and a wedge profile sole giving greater surface area for stability and traction.

Direct injected. Two Density TPU outsole / PU Midsole

SIZES: 2 - 15 UK Standard Last (EE) (Half sizes 4 ½ - 11 ½)

MATERIALS:

Leather: 2.4 - 2.6mm Full Grain 1st Grade Cow Hide Full chrome tannage

Colour/Finish: Black Oil Hide

Insole: 3mm Non Woven with special bacteria resistance

Heel Stiffener: Heavy duty 'Rhenoflex' N500N thermoplastic stiffener with woven polymer reinforcing

Footbed: Removable "Cambrelle" bonded padded innersole with contoured heel cup and arch support for additional support, hygiene and volumetric control.

Heel stiffener: 'Rhenoflex 3202' Thermoplastic stiffener with woven polymer reinforcing

Toecap: Heavy Duty V65P cap with woven polymer reinforcing

Thread: 20 gauge minimum poly/cotton to AS/NZS 2210.

Sole: Compression Moulded TPU Hydrolysis Resistant Outsole

Direct Injection Air Cushion Polyurethane Midsole

Electrical resistance > 1,500 volts.

200C heat resistance.

High resistance to oils/acids.

DESIGN / MANUFACTURE -

Pull-on loop securely stitched.

Min 2 rows stitching for vamp / upper closure.

No conductive materials to be used in construction.

SFMTA ENFORCEMENT
MEN'S MAGNUM STEALTH, BOOTS

ITEM 33

Stealth Force 8.0 SZ Style # 5198, or acceptable like alternate.


STEALTH FORCE 8.0 SZ

Style # 5198

Sizes:

MED 7-17

Wide 8 - 15

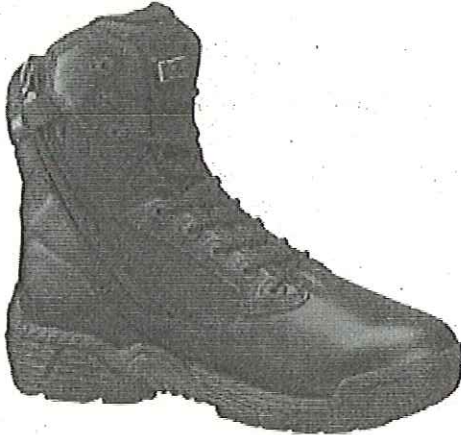

- FULL GRAIN LEATHER/ BALLISTIC NYLON UPPER
- CIRCULAR SIDE-ZIPPER
- CAMBRELLE® MOISTURE WICKING LINING
- AGION ANTIBACTERIAL TREATMENT
- COATS BARBOUR ANTI-FRAYING STITCHING THREAD
- DURABLE COMPOSITE HARDWARE
- NON METALLIC HARDWARE
- EN ISO 20347 CERTIFIED
- COMPOSITE SHANK
- COMPRESSION-MOLDED EVA MIDSOLE
- M-PACT CONTOURED SOCKLINE R WITH MEMORY FOAM
- X-TRACTION ZONE OUTSOLE
- AVAILABLE IN MED AND WIDE WIDTHS
- FLEX-ZONE WITH SIPING FOR TRACTION AND CONTROL

SFMTA ENFORCEMENT
WOMEN'S MAGNUM STEALTH, BOOTS

ITEM 34

Stealth Force 8.0 SZ Style # 5116, or acceptable like alternate.

STEALTH FORCE 6.0 SZ WPI WOS

STYLE # 5116

SIZES:

MED 5-11 (NOT AVAILABLE IN WIDE)



- FULL GRAIN LEATHER/ BALLISTIC NYLON UPPER
- YKK CIRCULAR SIDE-ZIPPER
- ION MASK WATERPROOF TECH
- CAMBRELLE@ MOISTURE WICKING LINING
- AGION ANTIBACTERIAL TREAT MENT
- COATS BARBOUR ANTI-FRAYIN G STITCHING THREAD
- DURABLE COMPOSITE HARDWARE
- EN ISO 20347 CERTIFIED
- COMPOSITE SHANK
- COMPRESSION-MOLDED EVA MIDSOLE
- M-PACT CONTOURED SOCKLINE R WITH MEMORY FOAM
- FLEX-ZONE WITH SIPING FOR TRACTION AND CONTROL
- X-TRACTION ZONE OUTSOLE
- WOMEN'S SPECIFIC LAST

SFMTA ENFORMENT
SHOULDER EMBLEM

ITEM 35

BC Supply, or acceptable like alternate.



NE PATTERN 86838

4-1/16" x 5" shield-shaped emblem
JM-290 Nassau blue polyester fabric background
PF900 black overlocked border
Laminated thermoplastic backing


EMBROIDERY THREAD COLORS ARE:

TUNG LI 483 SILVER GREY
TUNG LI 366 ROYAL BLUE
TUNG LI 362 L
PF 800 WHITE
PF 900 BLACK
TUNG LI 512 BRONZE
TUNG LI 701 RED

SFMTA ENFORMENT
HASH MARKS

ITEM 37

BC Supply, or acceptable like alternate.

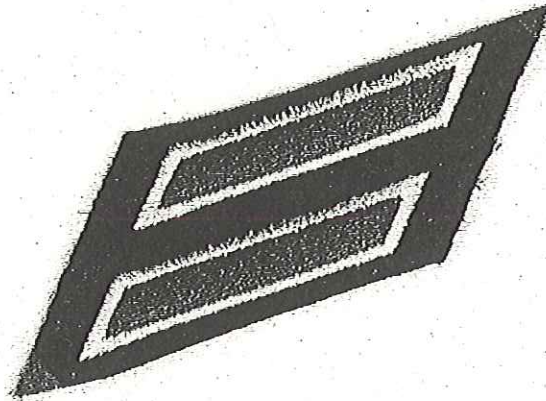

Hashmarks emblem design 108707
3/8" x 1-7/8"
black #108 fabric background
stripes are royal blue #4 and silver grey #51